

PCT

PRIOR ART
FILE COPY

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification:
H04Q 7/38

A1

(11) International Publication Number:

WO 96/10895

(43) International Publication Date:

11 April 1996 (11.04.96)

(21) International Application Number: PCT/US95/12389

(22) International Filing Date: 27 September 1995 (27.09.95)

(30) Priority Data:
316,157 30 September 1994 (30.09.94) US

(71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US).

(72) Inventors: COLLINS, David, N.; 1068 Arden Drive, Encinitas, CA 92024 (US). WILLIAMSON, Paul, T.; 5331 Channing Street, San Diego, CA 92117 (US). TIEDEMANN, Edward, G., Jr.; 4350 Bromfield Avenue, San Diego, CA 92122 (US). QUICK, Frank; 4502 Del Monte Avenue, San Diego, CA 92107 (US).

(74) Agent: MILLER, Russell, B.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).


(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND APPARATUS FOR PROVIDING BROADCAST MESSAGES IN A COMMUNICATIONS NETWORK

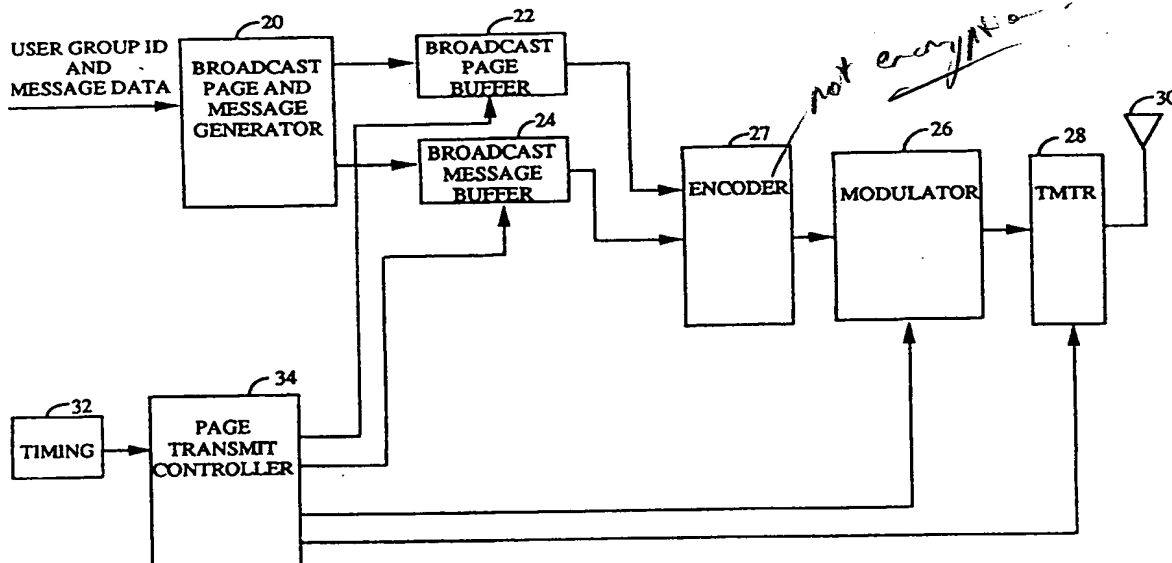

(57) Abstract

The present invention is a novel and improved method for providing broadcast short message services (SMS) in a communication network. It is an objective of the present invention to provide a method and apparatus that insures the successful transmission of the broadcast message while minimizing the impact of providing the short messaging service on overall system capacity. Messages to be broadcast to a group of users are provided by broadcast page generator (20), to a broadcast message buffer (24). The timing of the message transmissions is controlled by a page transmit controller (34), and the message is modulated onto an appropriate channel by modulator (26).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | GB | United Kingdom | MR | Mauritania |
| AU | Australia | GE | Georgia | MW | Malawi |
| BB | Barbados | GN | Guinea | NE | Niger |
| BE | Belgium | GR | Greece | NL | Netherlands |
| BF | Burkina Faso | HU | Hungary | NO | Norway |
| BG | Bulgaria | IE | Ireland | NZ | New Zealand |
| BJ | Benin | IT | Italy | PL | Poland |
| BR | Brazil | JP | Japan | PT | Portugal |
| BY | Belarus | KE | Kenya | RO | Romania |
| CA | Canada | KG | Kyrgyzstan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SI | Slovenia |
| CI | Côte d'Ivoire | LI | Liechtenstein | SK | Slovakia |
| CM | Cameroon | LK | Sri Lanka | SN | Senegal |
| CN | China | LU | Luxembourg | TD | Chad |
| CS | Czechoslovakia | LV | Latvia | TG | Togo |
| CZ | Czech Republic | MC | Monaco | TJ | Tajikistan |
| DE | Germany | MD | Republic of Moldova | TT | Trinidad and Tobago |
| DK | Denmark | MG | Madagascar | UA | Ukraine |
| ES | Spain | ML | Mali | US | United States of America |
| FI | Finland | MN | Mongolia | UZ | Uzbekistan |
| FR | France | | | VN | Viet Nam |
| GA | Gabon | | | | |

METHOD AND APPARATUS FOR PROVIDING BROADCAST MESSAGES IN A COMMUNICATIONS NETWORK

BACKGROUND OF THE INVENTION

5

I. Field of the Invention

The present invention relates to communications. More particularly,
the present invention relates to a novel and improved method and
10 apparatus for providing broadcast short message services.

II. Description of the Related Art

In communication systems, a central communications center
15 transmits data to remote subscriber stations. In order to efficiently use a
limited communications resource, the communications resource is divided
into sub-bands and channels. A typical allocation of channels would
include a pilot channel, a synchronization channel providing necessary
timing information, a plurality of traffic channels for conducting point to
20 point communications and a plurality of paging channels associated with
the traffic channels for providing signaling data.

Typically, when a subscriber station registers with the central
communications center, the central communications center informs the
subscriber station which paging channel of the plurality of available paging
25 channels to monitor. When the central communications center needs to set
up a point to point communication with a subscriber station it transmits a
traffic page on the paging channel being monitored by the subscriber station.
The traffic page would typically comprise subscriber station identification
information and traffic channel identification information. In response to
30 the received traffic page, the identified subscriber station would prepare to
conduct point to point communications on the identified traffic channel.

Power consumption is an important consideration of the subscriber
stations, particularly in the case of mobile subscriber stations. In order to
reduce the power consumption of the subscriber stations, a method known
35 as slotted paging was devised. Slotted paging in a spread spectrum
communications system is described in detail in copending U.S. Patent
Application Serial No. 07/847,149, assigned to assignee of the present
invention and incorporated by reference herein. By this technique a
subscriber station monitors its assigned paging channel at predetermined

intervals, which results in a significant power savings relative to monitoring the paging channel continuously.

The central communications center must know a priori the time slots when the subscriber station will monitor the paging channel, and must
5 reserve all pages for that subscriber station for these slots. When the paging channel is monitored at intervals, the system is referred to as slotted paging, whereas when the paging channel is continuously monitored it is referred to as non-slotted paging. The periods when the subscriber station is not
10 monitoring the paging channel can vary from subscriber station to subscriber station depending on the needs of the subscriber station user.

The expression slotted paging comes from dividing time into slots of a predetermined duration. In a slotted paging system, the subscriber station monitors a slot, it will again monitor a subsequent slot an integral number
15 slots in the future. The number of slots between periodically monitored slots is referred to as the slot cycle.

In addition, it is possible to send very short messages over the paging channel to subscriber stations. It is, however, important to keep the length of such messages to a minimum because the paging channel resource is a
shared resource and by its nature scarce.

20 In the communications industry there is a need to be able to transmit broadcast messages. Broadcast messages are messages that are provided to all users in a local area. For example a weather service, may provide weather forecasts to all the subscriber stations in a given area. The use of
slotted paging provides a challenge to providing broadcast message in such a
25 way that they can be received by all of the subscriber stations in the area.

SUMMARY OF THE INVENTION

The present invention is a novel and improved method for
30 providing broadcast short message services (SMS) in a communication network. It is an objective of the present invention to provide a method and apparatus that insures the successful transmission of the broadcast message while minimizing the impact of providing the short messaging
service on overall system capacity. It is further the objective of the present
35 invention to provide a method and apparatus for receiving broadcast messages without depriving the receiver of the benefit of reduced power consumption gained by slotted paging.

It is an advantage of the present invention that it is capable of successfully providing a broadcast short message service in communication

systems that provide for slotted paging and it is an advantage of the present invention that it is capable of operation in communication systems that support any number of paging channels.

5 In a first embodiment of the present invention, a broadcast message is provided on every paging channel and in every slot in a predetermined maximum slot cycle. This message reaches all subscriber stations regardless of its individual slot cycle or assigned paging channel. This message contains a header that provides the subscriber station with information upon which to discriminate between broadcast messages the subscriber
10 station wishes to receive and broadcast messages the subscriber station does not wish to receive.

In a second embodiment, a broadcast page is provided on every paging channel and in every slot in a predetermined maximum slot cycle. The broadcast page advertises a forthcoming broadcast message to all
15 subscriber stations. The corresponding broadcast message is provided once on all paging channels and if the subscriber station wishes to receive the broadcast message it monitors the paging channel at the appropriate time. The broadcast page may either explicitly indicate a single slot position in which the corresponding broadcast message will be provided or the slot
20 position in which the corresponding broadcast message will be provided may be determined in accordance with a deterministic algorithm.

The third embodiment of the present invention provides for periodic broadcast paging on all paging channels. In the third embodiment, all broadcast pages are provided in one or more slots in a periodic cycle. The
25 period of the broadcast paging slots is referred to as the broadcast cycle. As described above, the broadcast page may either explicitly indicate a single slot position in which the corresponding broadcast message will be provided or the slot position in which the corresponding broadcast message will be provided may be calculated using a predetermined convention. If the
30 subscriber station wishes to receive broadcast messages it must monitor its assigned paging channel during the broadcast page slot and then the subscriber station must monitor the paging channel during the appropriate broadcast message slot in order to receive the corresponding broadcast message.

35 The fourth embodiment of the present invention provides for single channel periodic broadcast paging. In the fourth embodiment, broadcast pages are provided periodically on a single designated paging channel. If a subscriber station wishes to receive broadcast messages, it tunes to the designated paging channel at the appropriate time to receive the broadcast

pages. If the subscriber station wishes to receive any of the corresponding broadcast messages, the subscriber station tunes to the broadcast message paging channel at the appropriate broadcast message slot to receive the broadcast message. The broadcast message paging channel can be provided
5 explicitly in the broadcast page or determined in accordance with a predetermined convention.

In a preferred embodiment, the broadcast pages and broadcast messages are provided redundantly with a temporal relationship to one another such that all subscriber stations are able to receive a broadcast page
10 and its corresponding broadcast message. A method for determining the optimal temporal relationship is described in detail herein.

The fifth embodiment operates in conjunction with the periodic broadcast paging methods described previously. In the fifth embodiment, a new page indicator is provided on every slot on every paging channel. This
15 new page indicator indicates to the subscriber station whether any new broadcast pages will be provided in the periodic broadcast page slot saving the subscriber station from monitoring the broadcast page slot when there are no new broadcast messages.

The sixth embodiment of the present invention operates in conjunction with methods in which broadcast pages advertise forthcoming broadcast messages. In the exemplary embodiment, the broadcast page provides a delivery vector which indicates how the corresponding broadcast message is to be received. In the exemplary embodiment, the delivery vector selectively specifies a frequency sub-band, a channel and a time slot in
20 which a corresponding broadcast message is to be provided. Furthermore, the broadcast page contains a broadcast handle that specifies the nature of the corresponding broadcast message. This broadcast message may contain information as to the source of the message, the function of the message, the language in which the message is provided and a sequence number.

30 The broadcast handle provides sufficient information to allow the subscriber station to determine whether or not to receive the related broadcast message. In particular, the sequence number allows the subscriber station to ignore duplicates thus providing a power savings by avoiding the reception of broadcast messages already received.

35

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when

taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

Figure 1 is an illustration of the environment of the present invention;

5 Figure 2 is an illustration of a division of a communication resource in the exemplary embodiment of a spread spectrum multiple access communication system;

Figure 3 is a block diagram of the transmission system of the present invention; and

10 Figure 4 is a block diagram of the receiving system of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15

Referring now to Figure 1, paging service providers 2, 4 and 6 provide messages to central communications center 10. The messages contain a header indicating the nature of the message and the actual message to be broadcast to the subscriber stations in the area. The broadcast messages are then broadcast by central communication center 10 to subscriber stations 12, 14 and 16. Subscriber stations 12, 14 and 16 receive the broadcast messages and selectively provide the messages to the subscriber station user. In the exemplary embodiment, the signals are transmitted by the central communication center 10 to subscriber stations 12, 14 and 16 in accordance with a CDMA communication format as detailed in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459.

Paging service providers 2, 4 and 6 may be commercial or governmental services that provide broadcast messages to users in the local area. A typical example of paging service providers include services that provide stock quote or weather information. Broadcast messages may also be provided by private parties through general network 8. A typical example of this would be the case where an employer wishes to provide a short message to its employees in the area.

35 Figure 2 illustrates the exemplary method of dividing a communications resource, namely an allocated frequency band. In the exemplary embodiment, the spectrum is divided into bands with the different bands being used by different service providers. For example, the spectrum may be divided into two halves as illustrated in Figure 2, with a

first half of the spectrum being used by carrier A and the second half being used by carrier B.

A carrier may then divide its portion of the overall spectrum into usable sub-bands. In Figure 2, carrier A has divided its band of the spectrum into k separate sub-bands. In the exemplary embodiment, each of these sub-bands is then subdivided into channels, which are designated according to their use. In Figure 2, CDMA FREQUENCY 3 is illustrated as being subdivided into a pilot channel, a synchronization channel, m traffic channels and n paging channels. It may be noted that it is not necessary for each sub-band to contain all of the channels illustrated. In the exemplary embodiment of a CDMA communication system, the channels are separated from one another in code space.

The traffic channels are used for point to point communications of data and are allocated to an individual user for the duration of the point to point service being provided. The paging channels are a set of commonly shared channels used by the all of the subscriber stations for receiving signaling and short message data. Signaling data such as a traffic page instructing a subscriber station that point to point communications are to be conducted and upon which traffic channel. The use of paging channels is described in detail the aforementioned copending U.S. Patent Application Serial No. 07/847,149.

When a communication system uses a plurality of paging channels, each user is assigned a paging channel on which to receive pages. A subscriber station monitors its assigned paging channel for traffic pages. In a non-slotted paging communication system the subscriber station continuously monitors its assigned paging channel for pages. However, because constant monitoring entails excessive energy expenditure, slotted paging communication systems were developed and are described in detail in the aforementioned copending U.S. Patent Application Serial No. 07/847,149.

In a slotted paging system, the subscriber station "wakes up" or "powers up" at predetermined time intervals, referred to as slot cycles, to monitor its assigned paging channel for traffic pages. The central communications center knows the times at which the subscriber station will be monitoring its assigned paging channel and in accordance with this knowledge provides pages at such times that they may be received.

Different subscriber stations may monitor their assigned paging channels at different slot cycles. In addition, in order to maximize system capacity, slotted paging systems distribute the slots in which different

subscriber stations receive pages as uniformly as possible over a predetermined maximum slot cycle. The maximum slot cycle refers to the number of slots within which all subscriber stations must monitor their assigned paging channels for incoming traffic pages. The varying slot cycles and the distribution of monitored slots over the maximum slot cycle pose challenges to broadcast paging, because it is rarely the case when all the users in the area are simultaneously monitoring any one paging channel.

The first embodiment of the present invention provides the broadcast message on every paging channel and in every slot in the maximum slot cycle.

Referring now to Figure 3, a message to be broadcast comprising a message and a header indicating the nature of the message is provided to broadcast page and message generator 20. Broadcast page and message generator 20 generates a broadcast message in accordance with a predetermined broadcast format.

The broadcast message is provided to broadcast message buffer 24. In response to timing signals from page transmit controller 34, broadcast message buffer 24 provides the broadcast message to encoder 27. Page transmit controller 34 in accordance with a clock signal from timing element 32 provides timing signals such that the broadcast message is provided redundantly in every slot in the maximum slot cycle.

Encoder 27 encodes the broadcast message for the purposes of error detection/correction or privacy. The encoded broadcast message is provided by encoder 27 to modulator 26.

Modulator 26 modulates the encoded broadcast message on each paging channel in accordance with signals from page transmit controller 34. In the exemplary embodiment, modulator 26 is a code division multiple access (CDMA) modulator, as detailed in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459. The modulated broadcast message data is provide to transmitter (TMTR) 28, which upconverts and amplifies the signal so as to provide the broadcast message data on all subbands in accordance with a signal from page transmit controller 34. The amplified and upconverted signal is provided to antenna 30 and broadcast to all subscriber stations in the area.

Figure 4 illustrates the exemplary receiving system of the present invention. The signal transmitted from antenna 30 is received at antenna 50 and provided to receiver (RCVR) 52, where it is downconverted and amplified. Page receive controller 62 in accordance with a clock signal from timing element 58 determines the appropriate slot times for the receiving

system to monitor its assigned paging channel. In this first exemplary embodiment, the receiving system monitors its assigned paging channel once per slot cycle for traffic pages and broadcast messages.

At the appropriate slot time page receive controller 62 provides a timing signal to receiver 52 that causes the receiver to become active and monitor its assigned paging channel. The received signal is provided to demodulator 54, where it is demodulated. In the exemplary embodiment, demodulator 54 is a CDMA demodulator as described in detail in U.S. Patent Nos. 4,901,307 and 5,103,459. Demodulator 54 provides the demodulated signal to decoder 56. Decoder 56 decodes the demodulated signal and selectively provides the broadcast message to the subscriber station user.

In a second exemplary embodiment of the present invention, a broadcast page giving notice of a forthcoming broadcast message is provided in every slot on every paging channel. The corresponding broadcast message is provided in one slot on every paging channel. The temporal relationship between the broadcast page and its corresponding broadcast message may be explicitly provided in the broadcast page or it may be determined in accordance with a deterministic algorithm.

Referring to Figure 3, a message to be broadcast comprising a message and a header indicating the nature of the message is provided to broadcast page and message generator 20. Broadcast page and message generator 20 generates a broadcast message and broadcast page in accordance with a predetermined broadcast format, for example a hashing algorithm.

In an exemplary hashing algorithm, assume that each broadcast page contains a broadcast handle that provides the subscriber station with information with which to determine the nature of the broadcast message. Then assume that there is a function H that maps the space of all broadcast handles to a uniform distribution into the range $0 \leq H(\text{handle}) < N$, where N is value determined to provide an acceptable distribution of the broadcast messages on the paging channel. If the broadcast page is provided in slot b_{page} , then the corresponding message will be provided in slot b_{msg} given by the value:

$$b_{\text{msg}} = b_0 + H(\text{handle}), \quad (1)$$

where b_0 is a fixed offset following the slot in which the last of the broadcast pages for the broadcast message, b_{msg} , occurs. In cases where the broadcast page is only provided once, b_0 is the slot in which the single broadcast page is provided.

In a preferred hashing algorithm, the central communications center is provided with a means for deconflicting two messages that hash to the same slot. In the preferred hashing algorithm the broadcast page is delineated into two separate sub-fields, one is referred to as the sequence
5 number, i , and the other is referred to as the identifier, x . If the broadcast page is provided in slot b_{page} , then the corresponding message will be provided in slot b_{msg} given by the value:

$$b_{\text{msg}} = b_0 + (H(x) + i) \bmod B, \quad (2)$$

10

where b_0 is a fixed offset following the slot in which the last of the broadcast page for the broadcast message, b_{msg} , occurs, $H(x)$ maps the space of all identifiers to the range of $0 \leq H(x) < N$ and B is the broadcast cycle. In general the sequence numbers for two broadcast messages provided in the
15 same broadcast cycle will be the same. However, in the case that two broadcast messages hash to the same slot number, the central communications center can deconflict the broadcast messages by changing the sequence number, i , of one of the messages.

The broadcast message is provided to broadcast message buffer 24 and
20 the broadcast page is provided to broadcast page buffer 22. Page transmit controller 34 provides timing signals to broadcast page buffer 22 such that the broadcast page is provided in each slot in the maximum slot cycle. In response to the timing signals from page transmit controller 34, broadcast page buffer 22 provides the broadcast pages to encoder 27. Encoder 27
25 encodes the broadcast pages and provides the encoded broadcast pages to modulator 26. Modulator 26 modulates the encoded broadcast pages such that the broadcast pages are provided on every paging channel in accordance with signals from page transmit controller 34.

The modulated broadcast pages are provided by modulator 26 to
30 transmitter (TMTR) 28, which upconverts and amplifies the signal so as to provide the broadcast pages on all paging channels in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast page signal is provided to antenna 30 and broadcast to all subscriber stations in the local area.

35 After the broadcast pages for the entire maximum slot cycle have been transmitted, page transmit controller 34 provides a timing signal at the appropriate broadcast message slot time to message buffer 24. Message buffer 24 provides the broadcast message to encoder 27 in accordance with

the timing signal. Encoder 27 encodes the broadcast message and provides the encoded broadcast message to modulator 26.

Modulator 26 modulates the encoded broadcast message on each paging channel in accordance with signals from page transmit controller 34. The modulated broadcast message is provided by modulator 26 to transmitter (TMTR) 28, which upconverts and amplifies the message so as to provide the broadcast message on all paging channels in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast message is provided to antenna 30 and broadcast to all subscriber stations in the local area.

Referring to Figure 4, page receive controller 62 provides a slot timing signal to receiver 52 that causes receiver 52 to monitor its assigned paging channel. The broadcast page is provided through antenna 50 to receiver 52 where it is downconverted and amplified. The received broadcast page is provided to demodulator 54, where it is demodulated and provided to decoder 56.

Decoder 56 decodes the broadcast page and provides the decoded broadcast page to page receive controller 62. Page receive controller 62 determines in accordance with a predetermined set of user preferences if the forthcoming broadcast message will be of interest to the subscriber station user.

If page receive controller 62 determines that the forthcoming broadcast message will be of interest to the subscriber station user, then it generates signals to receive the broadcast message. Page receive controller 62 determines the slot in which the broadcast message will be provided. The slot containing the broadcast message may be extracted from the broadcast page or determined in accordance with a deterministic algorithm.

Page receive controller 62 provides a slot timing signal to receiver 52 that cause the receiver to monitor the paging channel at the time appropriate for receiving the broadcast message. Receiver 52 receives the broadcast message provided through antenna 50 and downconverts and amplifies the received broadcast message. The received broadcast message is then provided to demodulator 54 which demodulates the received broadcast message. The demodulated broadcast message is provided to decoder 56 which decodes the broadcast message and provides the broadcast message to the subscriber station user.

In a third exemplary embodiment, broadcast pages are provided periodically in a designated slot on all paging channels. As described previously, the broadcast pages provide information about forthcoming

broadcast messages. The corresponding broadcast messages are provided at least once on every paging channel. The period at which the broadcast pages are provided is referred to as the broadcast cycle. If a subscriber station is to receive broadcast messages it must monitor its assigned paging channel
5 during the slot times in which broadcast pages are provided.

Referring to Figure 3, a message to be broadcast comprising a message and a header indicating the nature of the message is provided to broadcast page and message generator 20. Broadcast page and message generator 20 generates a broadcast message and broadcast page in accordance with a
10 predetermined broadcast format.

The broadcast message is provided to broadcast message buffer 24 and the broadcast page is provided to broadcast page buffer 22. Page transmit controller 34 provides a timing signal to broadcast page buffer 22 to provide the broadcast page in the appropriate broadcast page slot. In response to the
15 timing signal from page transmit controller 34, broadcast page buffer 22 provides the broadcast page to encoder 27. Encoder 27 encodes the broadcast page and provides the encoded broadcast page to modulator 26.

Modulator 26 modulates the encoded broadcast page so as to provide the broadcast page on each paging channel in accordance with signals from
20 page transmit controller 34. The modulated broadcast page is provided by modulator 26 to transmitter (TMTR) 28, which upconverts and amplifies the broadcast page signal so as to provide the broadcast page on all paging channels in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast page signal is provided to antenna 30
25 and broadcast to all subscriber stations in the local area.

In the transmission of the corresponding broadcast message, page transmit controller 34 provides a timing signal to broadcast message buffer 22 indicating the appropriate slot in which to provide the broadcast message. In response, broadcast message buffer 22 provides the broadcast
30 message to encoder 27. Encoder 27 encodes the broadcast message and provides the encoded broadcast message to modulator 26.

Modulator 26 modulates the encoded broadcast message on each paging channel in accordance with signals from page transmit controller 34. The modulated broadcast message is provided by modulator 26 to
35 transmitter (TMTR) 28, which upconverts and amplifies the broadcast message to provide the broadcast message on all paging channels in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast message signal is provided to antenna 30 and broadcast to all subscriber stations in the local area.

Referring to Figure 4, page receive controller 62 provides a slot timing signal to receiver 52 that causes receiver 52 to monitor its assigned paging channel during the broadcast page slot. The received broadcast page is provided to demodulator 54, where it is demodulated and provided to decoder 56. Decoder 56 decodes the broadcast page signal and provides the decoded broadcast page to page receive controller 62. Page receive controller 62 determines in accordance with a set of user preferences if the corresponding broadcast message will be of interest to the subscriber station user.

If page receive controller 62 determines that the forthcoming broadcast message is of interest to the subscriber station user, then it generates signals to receive the corresponding broadcast message. Page receive controller 62 determines the slot in which the broadcast message will be provided. As described previously, the slot containing the broadcast message may be extracted from the broadcast page or determined by a deterministic algorithm.

Page receive controller 62 provides a slot timing signal to receiver 52 that causes receiver 52 to monitor its paging channel at the time appropriate for receiving the broadcast message. Receiver 52 receives the broadcast message provided through antenna 50 and downconverts and amplifies the received broadcast message and provides the signal to demodulator 54. Demodulator 54 demodulates the received broadcast message and provides the demodulated broadcast message to decoder 56 which decodes the broadcast message and provides the broadcast message to the subscriber station user.

In the fourth embodiment of the present invention, broadcast pages are provided periodically on a single designated paging channel. In the exemplary embodiment, the corresponding broadcast messages are provided on the same designated paging channel. If a subscriber station is to receive broadcast messages, it must tune to the designated paging channel at the appropriate slot time to receive the broadcast pages.

If the subscriber station wishes to receive a corresponding broadcast message it must tune to and monitor the designated paging channel at the appropriate broadcast message slot time. As described previously, the temporal relationship between the broadcast page and corresponding broadcast message may be explicitly provided in the broadcast page or it may be determined by a deterministic relationship.

Referring to Figure 3, a message to be broadcast comprising a message and a header indicating the nature of the message is provided to broadcast

page and message generator 20. Broadcast page and message generator 20 generates a broadcast message and broadcast page in accordance with a predetermined broadcast format.

5 The broadcast message is provided to broadcast message buffer 24 and the broadcast page is provided to broadcast page buffer 22. Page transmit controller 34 provides a timing signal to provide the broadcast page in the appropriate slot. In response to the timing signal from page transmit controller 34, broadcast page buffer 22 provides the broadcast page to encoder 27. Encoder 27 encodes the broadcast page and provides the encoded
10 broadcast page to modulator 26.

Modulator 26 provides the encoded broadcast page on the designated paging channel in accordance with a signal from page transmit controller 34. The modulated broadcast page is provided by modulator 26 to transmitter (TMTR) 28, which upconverts and amplifies the broadcast page signal so as
15 to provide the broadcast page on the designated paging channel in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast page signal is provided to antenna 30 and broadcast to all subscriber stations in the local area.

In the transmission of the corresponding broadcast message, page
20 transmit controller 34 provides a timing signal to broadcast message buffer 22 indicating the appropriate slot in which to provide the broadcast message. Broadcast message buffer 22 provides the broadcast message to encoder 27. Encoder 27 encodes the broadcast message and provides the encoded broadcast message to modulator 26.

25 Modulator 26 modulates the encoded broadcast message on the designated paging channel in accordance with signals from page transmit controller 34. The modulated broadcast message is provided by modulator 26 to transmitter (TMTR) 28, which upconverts and amplifies the signal to provide the broadcast message on the designated paging
30 channel in accordance with a signal from page transmit controller 34. The amplified and upconverted broadcast message signal is provided to antenna 30 and broadcast to all subscriber stations in the local area.

Referring to Figure 4, page receive controller 62 provides a slot timing
35 signal to receiver 52 that causes receiver 52 to tune to and monitor the designated paging channel during the broadcast page slot. The broadcast page is received through antenna 50 and downconverted and amplified by receiver 52. Receiver 52 provides the broadcast page to demodulator 54, where it is demodulated and provided to decoder 56. Decoder 56 decodes the broadcast page and provides the decoded broadcast page to page receive

controller 62. Page receive controller 62 determines in accordance with a set of user preferences if the corresponding broadcast message is of interest to the subscriber station user.

If page receive controller 62 determines that the forthcoming
5 broadcast message is of interest to the subscriber station user, then it generates signals to receive the corresponding broadcast message. Page receive controller 62 determines the slot in which the broadcast message will be provided.

Page receive controller 62 provides a slot timing signal to receiver 52
10 that causes receiver 52 to tune to and monitor the designated paging channel at the broadcast message slot time. Receiver 52 receives the broadcast message provided through antenna 50 and downconverts and amplifies the received broadcast message. Demodulator 54 demodulates the
15 received broadcast message and provides the demodulated broadcast message to decoder 56 which decodes the broadcast message and provides the broadcast message to the subscriber station user.

In a preferred embodiment of the fourth embodiment, the broadcast page and broadcast message data are each provided twice in order to insure that two consecutive broadcast paging slots or any two consecutive
20 transmissions of a broadcast message do not both coincide with the traffic paging slots of any subscriber station. Subscriber stations in the system may be assigned a slot cycle of a specified period, S_n . Each subscriber station is able to choose its slot cycle from a range of slot cycles, S_1, S_2, \dots . For an arbitrary subscriber unit, x , having a traffic slot cycle of S_n , its paging slots, s_n ,
25 will occur according to:

$$s_n = (n * S_n) + F(x), \quad (3)$$

where $F(x)$ uniformly maps a subscriber's unique station identifier to the
30 range $0 \leq F(x) < S_n$.

The system may also specify a broadcast paging slot cycle having period B where at least one slot of every broadcast cycle is used to transmit broadcast pages. In such a system, it may be desirable to choose broadcast
35 paging slots in such a way that no two consecutive broadcast paging slots both coincide with the traffic paging slot of an arbitrary subscriber. This can be done by choosing consecutive paging slots such that the distance between them, in slots, is not evenly divisible by any traffic slot cycle S_n that is available to subscriber stations.

In the exemplary embodiment, subscriber stations are able to choose from a set of traffic paging cycles having period as specified by :

$$S_n = 2^n * 16, (0 \leq n \leq 7) \quad (4)$$

5

Let the broadcast paging cycle period for all subscriber stations be specified by:

$$B = 2^m * 16, (0 \leq m \leq 7) \quad (5)$$

- 10 Let b_k represent a slot number relative to the beginning of broadcast cycle k . Then let succeeding broadcast page slots be defined by the following recurrence relation.

$$b_k = (b_{k-1} + i) \bmod B. \quad (6)$$

15

Note that any value of i , $1 \leq i \leq 15$ will produce broadcast paging slots having the desired property of non-coincidence with traffic paging slots. However, in a variation on the embodiment mentioned above, subscriber stations may actually monitor the slot immediately preceding and immediately following their assigned slots, thus restricting the value of i such that $2 \leq i \leq 14$. Also note that it may be desirable to pick a value of i such that the distance between two broadcast pages, both of which may coincide with the traffic paging slot of some subscriber unit, is maximized. A value of $i=3$ has this property and is the value selected for the exemplary embodiment. In fact, any value of i which is less than and relatively prime to the least common factor of B and S_n has this property. To insure that two consecutive pages P_k and P_{k+1} do not both coincide with the traffic slots of an arbitrary subscriber station, the difference $(P_{k+1} - P_k)$ must not be divisible by S_n .

30 In a first method to deconflict traffic and broadcast slots, a first broadcast page is transmitted advertising two forthcoming broadcast messages, then a second broadcast page is transmitted advertising the same two forthcoming broadcast messages. If as described above the two broadcast pages are separated by a broadcast cycle plus a number of slots that is less than and relatively prime to the least common factor of B and S_n , then all subscriber stations can receive one or the other of the two broadcast pages.

35

If in addition the two redundantly provided broadcast messages are similarly separated by a broadcast cycle plus a number of slots that is less than and relatively prime to the least common factor of B and S_n , then all

subscriber stations can receive one or the other of the two broadcast messages. The positions of the broadcast messages can be provided explicitly in the broadcast pages or the number of slots between the second broadcast page and the first corresponding broadcast message can be determined in accordance with the hashing algorithms described previously. It should be noted that providing more than one broadcast page or message in a given broadcast cycle may result in an unacceptable distribution, which can be fixed by the additional offset of a broadcast cycle provided between any of the broadcast pages or messages.

In a second method to deconflict traffic and broadcast slots, a first broadcast page is transmitted advertising a forthcoming broadcast message, then a second broadcast page is transmitted advertising the same forthcoming duplicate broadcast message. In this method the two broadcast pages are separated by a broadcast cycle plus a number of slots that is less than and relatively prime to the least common factor of B and S_n . The relationship between the broadcast page and its corresponding broadcast message must be equal to an integral multiple of the least common multiple of the possible slot cycles.

The fifth exemplary embodiment operates in conjunction with any of the methods described previously for periodic broadcast paging. In the fifth embodiment, the transmission system provides a new page indicator in each slot in a maximum slot cycle and on every paging channel. When a subscriber station monitors its paging channel for traffic pages, it can determine from the new page indicator if it needs to monitor for new broadcast pages. This can result in a power savings for the subscriber station, in that it will not unnecessarily monitor for incoming broadcast pages. This exemplary embodiment operates in conjunction with the second third or fourth exemplary embodiments.

In the exemplary embodiment, the broadcast page consists essentially of two fields. The first field referred to as the broadcast handle is used by the subscriber station to discriminate between those messages that it wishes to receive and those that it does not. The second field is referred to as the delivery vector and as described previously tells the subscriber station to which channel and sub-band to tune and in which slot to receive the corresponding broadcast message.

The broadcast handle consists optionally of four sub-fields. The sub-fields include source address, function code, sequence number and language indicator. The source address identifies the sender of the message. The function code indicates the subject matter of the message. The sequence

number identifies the version of the message, so that in the case where the broadcast page is provided redundantly, the subscriber station will be able to avoid receiving the same message twice. The language indicator indicates the language in which the message is provided (i.e. English, Spanish, French, etc.). It is not necessary for each sub-field to be uniquely specified as long as the aggregate broadcast handle is uniquely specified. It is, also, not necessary to provide information in all of the sub-fields.

The delivery vector consists of three sub-fields which in the exemplary embodiment included frequency band, channel and slot sub-fields. The frequency band sub-field specifies the frequency sub-band in which the corresponding broadcast message will be provided. The channel sub-field specifies the paging or traffic channel where the corresponding broadcast message will be provided. The slot sub-field specifies the slot number within the specified sub-band and channel where the broadcast pages will be provided. As described previously any or all of the delivery vector sub-fields can be provided explicitly or determined in accordance with a predetermined calculation format.

It may be desirable to provide paging using a combination of the abovementioned techniques. For example it may be desirable to employ a more efficient broadcast paging method in general situations, but to provide an explicit page on all slots in a broadcast cycle in the event of an emergency message.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

WE CLAIM:

CLAIMS

1. In a network containing a broadcast component where a plurality of receivers receive a single transmitted broadcast message, an apparatus for transmitting broadcast messages, comprising:
 - page transmit controller means for providing a plurality of timing signals indicative of all slot positions in a predetermined maximum slot cycle;
 - broadcast message buffer means for redundantly providing said broadcast message in accordance with said plurality of timing signals;
 - modulator means for receiving said redundantly provided broadcast message for all paging channels; and
 - transmitter means for transmitting said broadcast message in all slots in said maximum slot cycle on all paging channels.
2. In a network containing a broadcast component where a plurality of receivers receive a single transmitted broadcast message, an apparatus for receiving broadcast messages, comprising:
 - page receive controller means for providing a timing signal indicative of a slot in a predetermined traffic slot cycle;
 - receiver means for monitoring an assigned paging channel at intervals determined in accordance with said timing signal and for receiving said broadcast message; and
 - decoder means for decoding said broadcast message and for selectively providing said decoded broadcast message.
3. In a network containing a broadcast component where a plurality of receivers receive a single transmitted broadcast message, an apparatus for transmitting broadcast messages, comprising:
 - page transmit controller means for providing a plurality of timing signals indicative of all slot positions in a predetermined maximum slot cycle and for providing a single message timing signal;
 - broadcast page buffer means for redundantly providing a broadcast page in accordance with said plurality of timing signals;
 - broadcast message buffer means for providing said broadcast message in accordance with said message timing signal;
 - modulator means for receiving said redundantly provided broadcast pages and for providing said redundantly provided broadcast pages on all

14 paging channels and for providing said broadcast message on all paging
channels; and

16 transmitter means for transmitting said redundant broadcast pages
and said broadcast message.

4. In a network containing a broadcast component where a
2 plurality of receivers receive a single transmitted broadcast message, an
apparatus for receiving broadcast messages, comprising:

4 page receive controller means for providing a timing signal
indicative of a slot in a predetermined traffic slot cycle;

6 receiver means for monitoring an assigned paging channel at
intervals determined in accordance with said timing signal and for
8 receiving a broadcast page; and

decoder means for decoding said broadcast page and for providing
10 said decoded broadcast page to said page receive controller; and

wherein said page receive controller is further for determining in
12 accordance with a predetermined set of user preferences a signals for
receiving a corresponding broadcast message.

5. In a network containing a broadcast component where a
2 plurality of receivers receive a single transmitted broadcast message, an
apparatus for transmitting broadcast messages, comprising:

4 page transmit controller means for providing a page timing signal
indicative of a slot position in a predetermined broadcast cycle and for
6 providing a message timing signal;

8 broadcast page buffer means for providing a broadcast page in
accordance with said page timing signal;

10 broadcast message buffer means for providing said broadcast message
in accordance with said message timing signal;

12 modulator means for receiving said broadcast page and for providing
said broadcast page on all paging channels and for providing said broadcast
message on all paging channels; and

14 transmitter means for transmitting said broadcast page and said
broadcast message.

6. In a network containing a broadcast component where a
2 plurality of receivers receive a single transmitted broadcast message, an
apparatus for receiving broadcast messages, comprising:

- 4 page receive controller means for providing a timing signal
indicative of broadcast page slot;
- 6 receiver means for monitoring an assigned paging channel in
accordance with said timing signal and for receiving a broadcast page; and
- 8 decoder means for decoding said broadcast page and for providing
said decoded broadcast page to said page receive controller; and
- 10 wherein said page receive controller is further for determining in
accordance with a predetermined set of user preferences a signals for
- 12 receiving a corresponding broadcast message.

7. In a network containing a broadcast component where a
2 plurality of receivers receive a single transmitted broadcast message, an
apparatus for transmitting broadcast messages, comprising:
- 4 page transmit controller means for providing a page timing signal
indicative of a slot position in a predetermined broadcast cycle and for
- 6 providing a message timing signal;
- 8 broadcast page buffer means for providing a broadcast page in
accordance with said page timing signal;
- 10 broadcast message buffer means for providing said broadcast message
in accordance with said message timing signal;
- 12 modulator means for receiving said broadcast page and for providing
said broadcast page on a designated paging channels and for providing said
broadcast message on all paging channels; and
- 14 transmitter means for transmitting said broadcast page and said
broadcast message.

8. In a network containing a broadcast component where a
2 plurality of receivers receive a single transmitted broadcast message, an
apparatus for receiving broadcast messages, comprising:
- 4 page receive controller means for providing a timing signal
indicative of broadcast page slot;
- 6 receiver means for tuning to and monitoring a designated paging
channel in accordance with said timing signal and for receiving a broadcast
- 8 page; and
- 10 decoder means for decoding said broadcast page and for providing
said decoded broadcast page to said page receive controller; and
- 12 wherein said page receive controller is further for determining in
accordance with a predetermined set of user preferences a signals for
receiving a corresponding broadcast message.

1/4

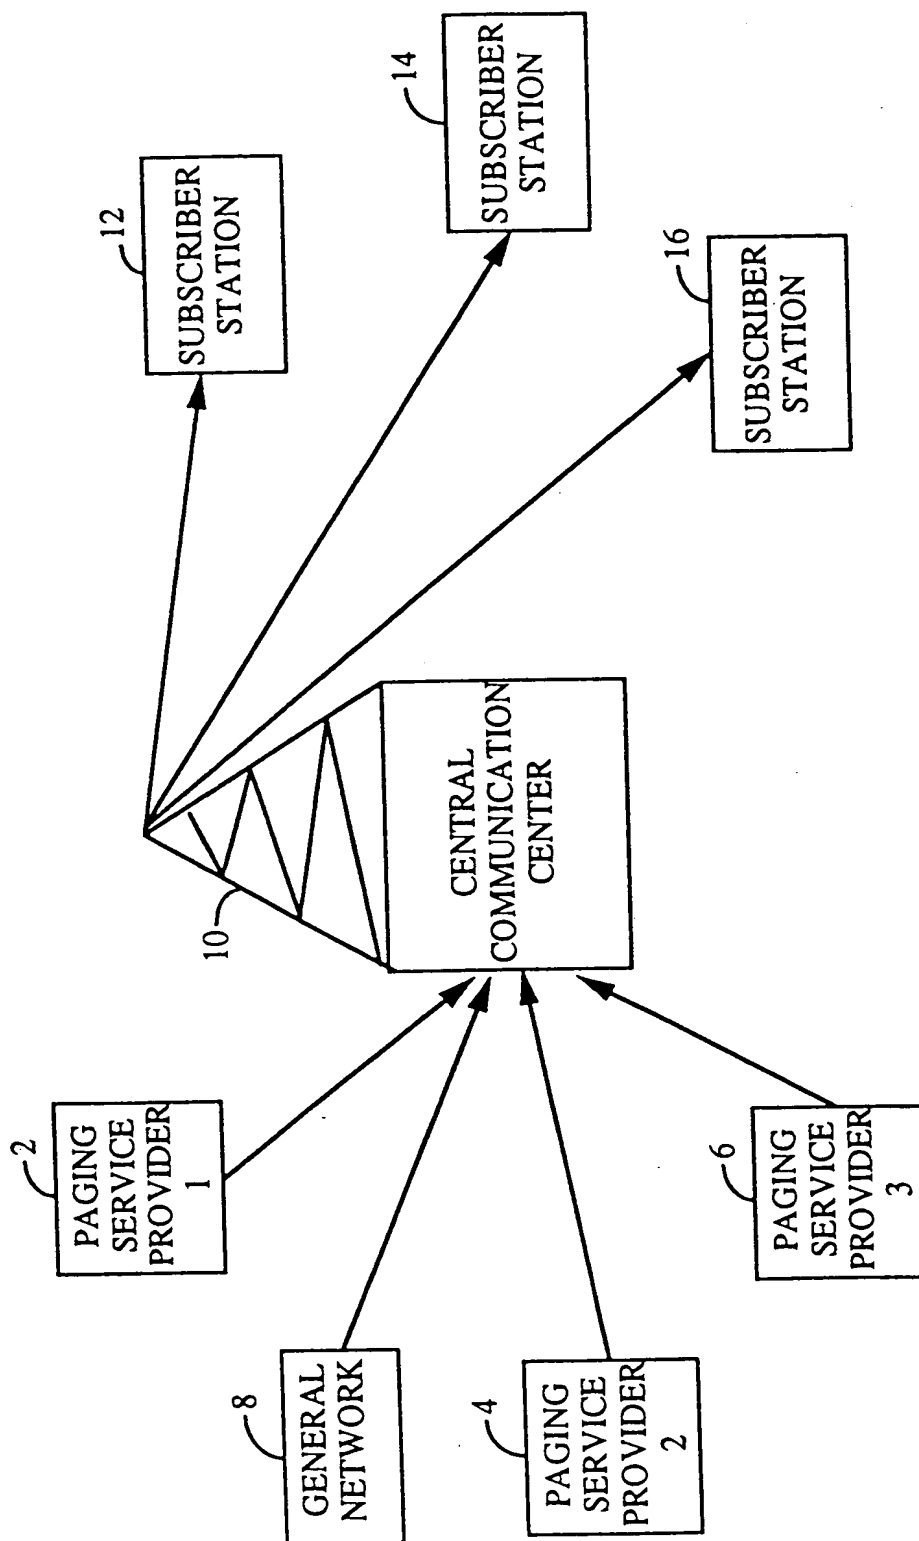


FIG. 1



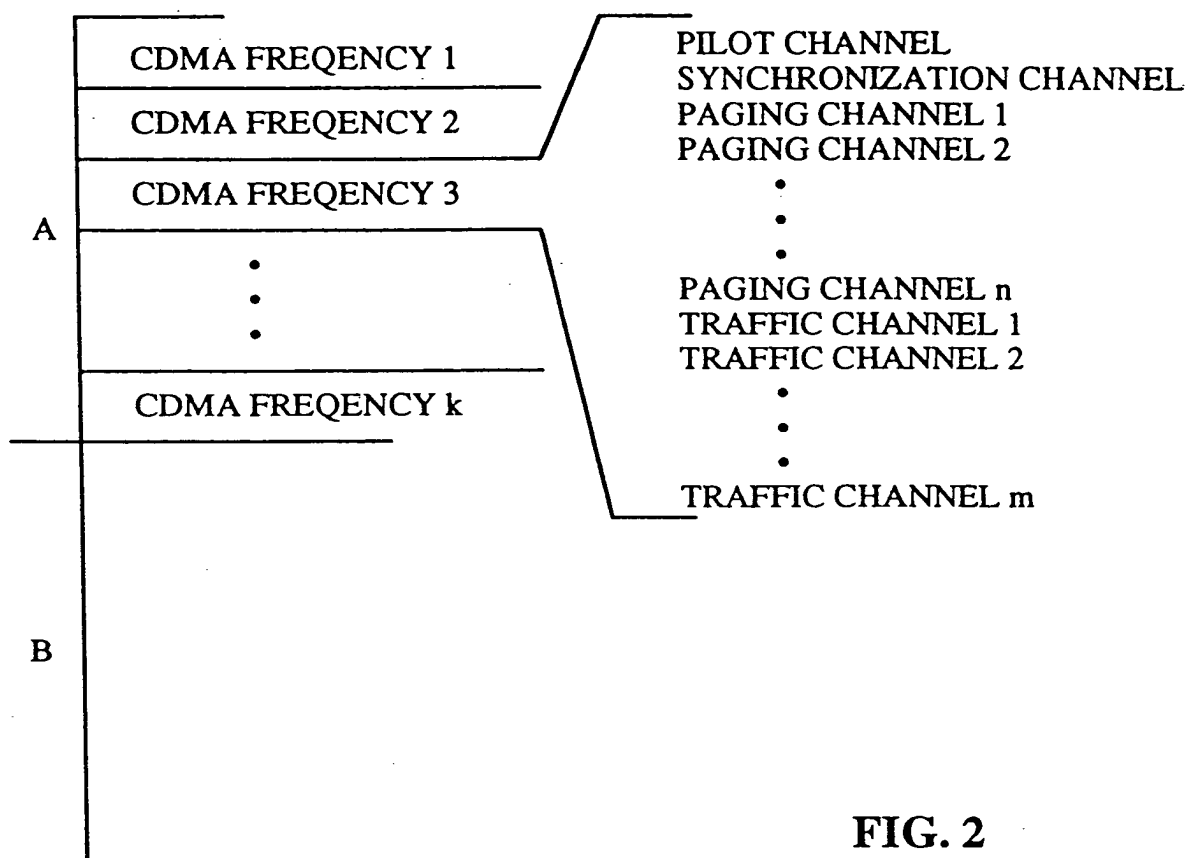


FIG. 2

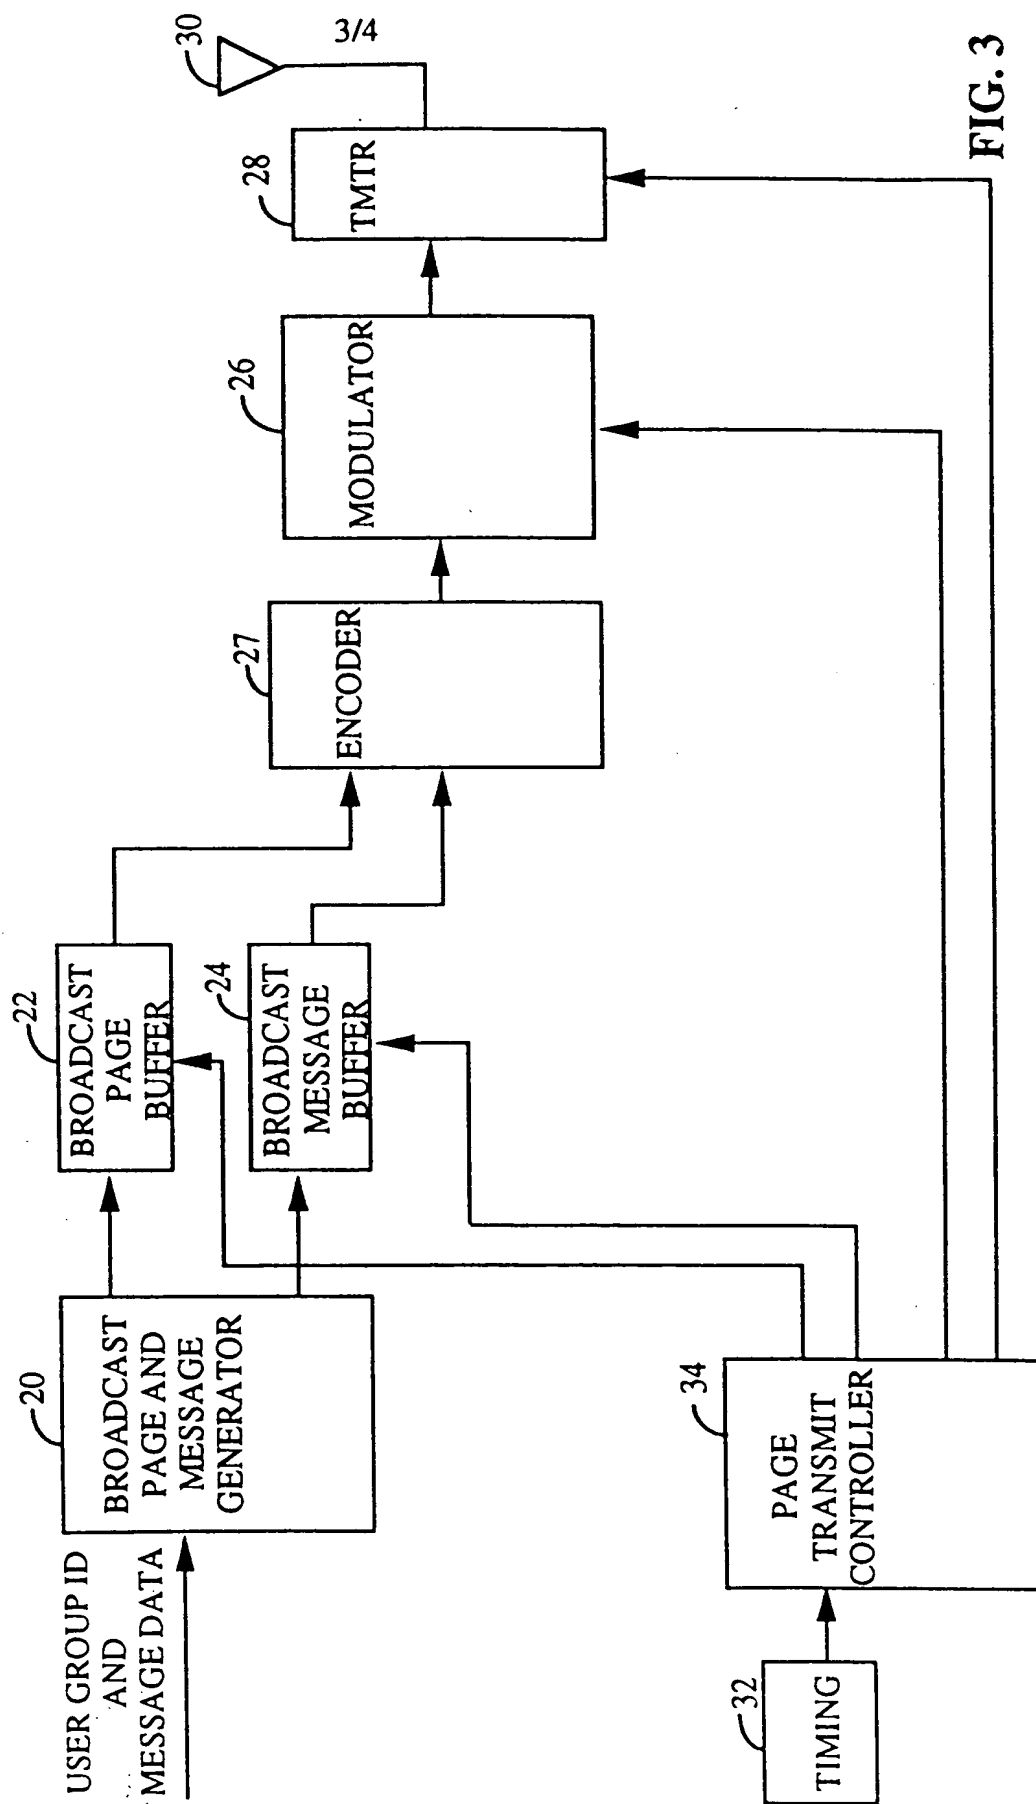

4/4

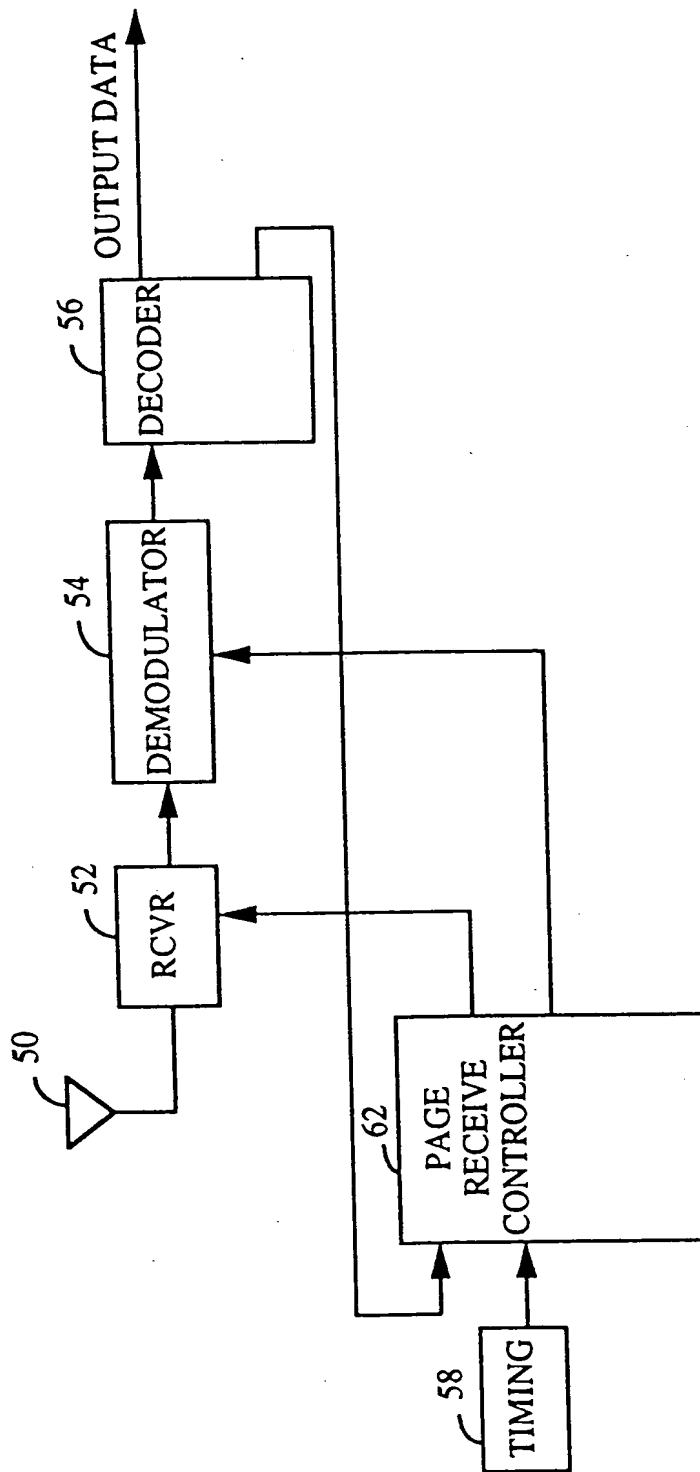

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/12389

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| A | WO,A,93 18596 (QUALCOMM INC) 16 September 1993 cited in the application see page 2, line 3 - page 3, line 25 --- | 1-8 |
| A | EP,A,0 428 126 (NIPPON TELEGRAPH & TELEPHONE) 22 May 1991 see column 1, line 53 - column 2, line 31 see column 3, line 1 - column 4, line 42 --- | 1-8 |
| A | US,A,5 301 225 (SUZUKI ET AL.) 5 April 1994 see column 2, line 32 - column 3, line 30 see column 3, line 59 - column 4, line 40 --- | 1-8 |
| A | WO,A,94 09599 (NOKIA TELECOMMUNICATIONS OY) 28 April 1994 see page 3, line 5 - page 5, line 7 --- | 1-8 |
| -/-- | | |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

25 January 1996

Date of mailing of the international search report

20.02.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Gastaldi, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/12389

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to -claim No. |
|------------|--|------------------------|
| A | GB,A,2 244 409 (TELECOM SECURICOR CELLULAR RAD) 27 November 1991 see abstract see page 2, line 25 - page 4, line 9 ---- | 1-8 |
| A | WO,A,90 10987 (MOTOROLA INC) 20 September 1990 see page 3, line 9 - line 28 ----- | 1-8 |

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 95/12389

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO-A-9318596 | 16-09-93 | US-A- 5392287 | 21-02-95 |
| | | CN-A- 1082272 | 16-02-94 |
| | | EP-A- 0629324 | 21-12-94 |
| | | FI-A- 944057 | 02-09-94 |
| | | JP-T- 7505030 | 01-06-95 |
| | | SK-A- 105394 | 08-03-95 |
| | | ZA-A- 9301406 | 04-01-94 |
| EP-A-0428126 | 22-05-91 | JP-A- 3154437 | 02-07-91 |
| | | DE-D- 69020109 | 20-07-95 |
| | | DE-T- 69020109 | 28-09-95 |
| | | US-A- 5146214 | 08-09-92 |
| US-A-5301225 | 05-04-94 | JP-A- 5183487 | 23-07-93 |
| WO-A-9409599 | 28-04-94 | FI-A- 924801 | 23-04-94 |
| | | AU-B- 5113693 | 09-05-94 |
| GB-A-2244409 | 27-11-91 | NONE | |
| WO-A-9010987 | 20-09-90 | EP-A- 0435964 | 10-07-91 |
| | | JP-T- 3505273 | 14-11-91 |
| | | US-A- 5128938 | 07-07-92 |

THIS PAGE BLANK (USPTO)